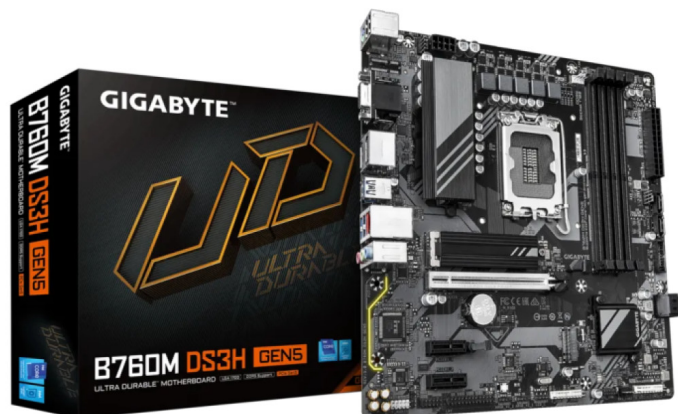


**OSNOVNA PLOŠČA 1700 GIGABYTE
B760M DS3H GEN5 MICROATX VGA
HDMI 2XDISPLAYPORT****140,99€****SKU:** 872793[MB 1700](#), [Osnovne plošče](#), [Računalniški deli](#)**OPIS IZDELKA****PODNOŽJE:** INTEL LGA 1700**ZA PROCESORJE:** 14/13/12 Generation Core i7/i5/i3/Pentium/Celeron**FORMAT:** micro ATX format 24.4 cm x 24.4 cm**VEZNI ČIP:** INTEL B760**POMNILNIK:**

4 x DDR5 DIMM ECC/non-ECC 7600(O.C.) /7400(O.C.) /7200(O.C.) /7000(O.C.) /6800(O.C.) /6600(O.C.) / 6400(O.C.) / 6200(O.C.) / 6000(O.C.) / 5800(O.C.)/ 5600/5200/4800/4400MHz) do skupno 256GB kapacitete, dual channel in XMP podpora

GRAFIKA: DA - preko CPU**RAID:** RAID 0, RAID 1, RAID 5, and RAID 10 podpora SATA storage**RAZŠIRITVENE REŽE:**

CPU:

- 1 x PCI Express x16 slot, supporting PCIe 5.0 and running at x16
The PCIEX16 slot can only support a graphics card or an NVMe SSD

Chipset:

- 2 x PCI Express x1 slots, supporting PCIe 3.0 and running at x1

MREŽNA KARTICA: Realtek 2.5GbE LAN chip**ZVOČNA KARTICA:** Realtek codec High Definition Audio (2/4/5.1/7.1-channel)**NOTRANJI PRIKLJUČKI:**

1 x 24-pin ATX main power connector

1 x 8-pin ATX 12V power connector



- 1 x CPU fan header
- 3 x system fan headers
- 2 x addressable RGB Gen2 LED strip headers
- 1 x RGB LED strip header
- 2 x M.2 Socket 3 connectors
- 4 x SATA 6Gb/s connectors
- 1 x front panel header
- 1 x front panel audio header
- 1 x USB 3.2 Gen 1 header
- 2 x USB 2.0/1.1 headers
- 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0/GC-TPM2.0 SPI V2 module only)
- 1 x serial port header
- 1 x parallel port header
- 1 x S/PDIF Out header
- 1 x Q-Flash Plus button
- 1 x reset jumper
- 1 x Clear CMOS jumper
- ZUNANJI PRIKLJUČKI:**
- 2 x USB 2.0/1.1 ports
- 1 x PS/2 keyboard/mouse port
- 1 x D-Sub port (Note)
- 1 x HDMI port (Note)
- 2 x DisplayPorts (Note)
- 3 x USB 3.2 Gen 1 ports
- 1 x USB Type-C port, with USB 3.2 Gen 2 support
- 1 x RJ-45 port
- 3 x audio jacks
- DODATNO:**
- iTE I/O Controller Chip
- H/W Monitoring
- Voltage detection
- Temperature detection
- Fan speed detection
- Water cooling flow rate detection
- Fan fail warning
- Fan speed control
- BIOS
- 1 x 128 Mbit flash
- Use of licensed AMI UEFI BIOS
- PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
- Unique Features
- Support for GIGABYTE Control Center (GCC)



Support for Q-Flash
AR-SET d.o.o. Dobravica 10 A 8310 Šentjernej Davčna št.: SI16935381 Tel: 059 048 227
Support for Q-Flash Plus
Support for Smart Backup
Bundled Software
Norton Internet Security (OEM version)

Uradna stran proizvajalca: <https://www.gigabyte.com/Motherboard/B760M-DS3H-GEN5#kf>