AR-SET d.o.o. Dobravica 10 A 8310 Šentjernej Davčna št.: SI16935381 Tel: 059 048 227



OSNOVNA PLOŠČA LGA1851 ASROCK PRO RS MICROATX HDMI DISPLAYPORT

179,99€

SKU: 262356
MB 1851, Osnovne plošče, Računalniški deli

OPIS IZDELKA

Optimizirana VRM zasnova

Napredna zasnova napajalnega modula z Dr.MOS zagotavlja čisto in stabilno napetost procesorju, kar omogoča boljšo zmogljivost in učinkovitost.

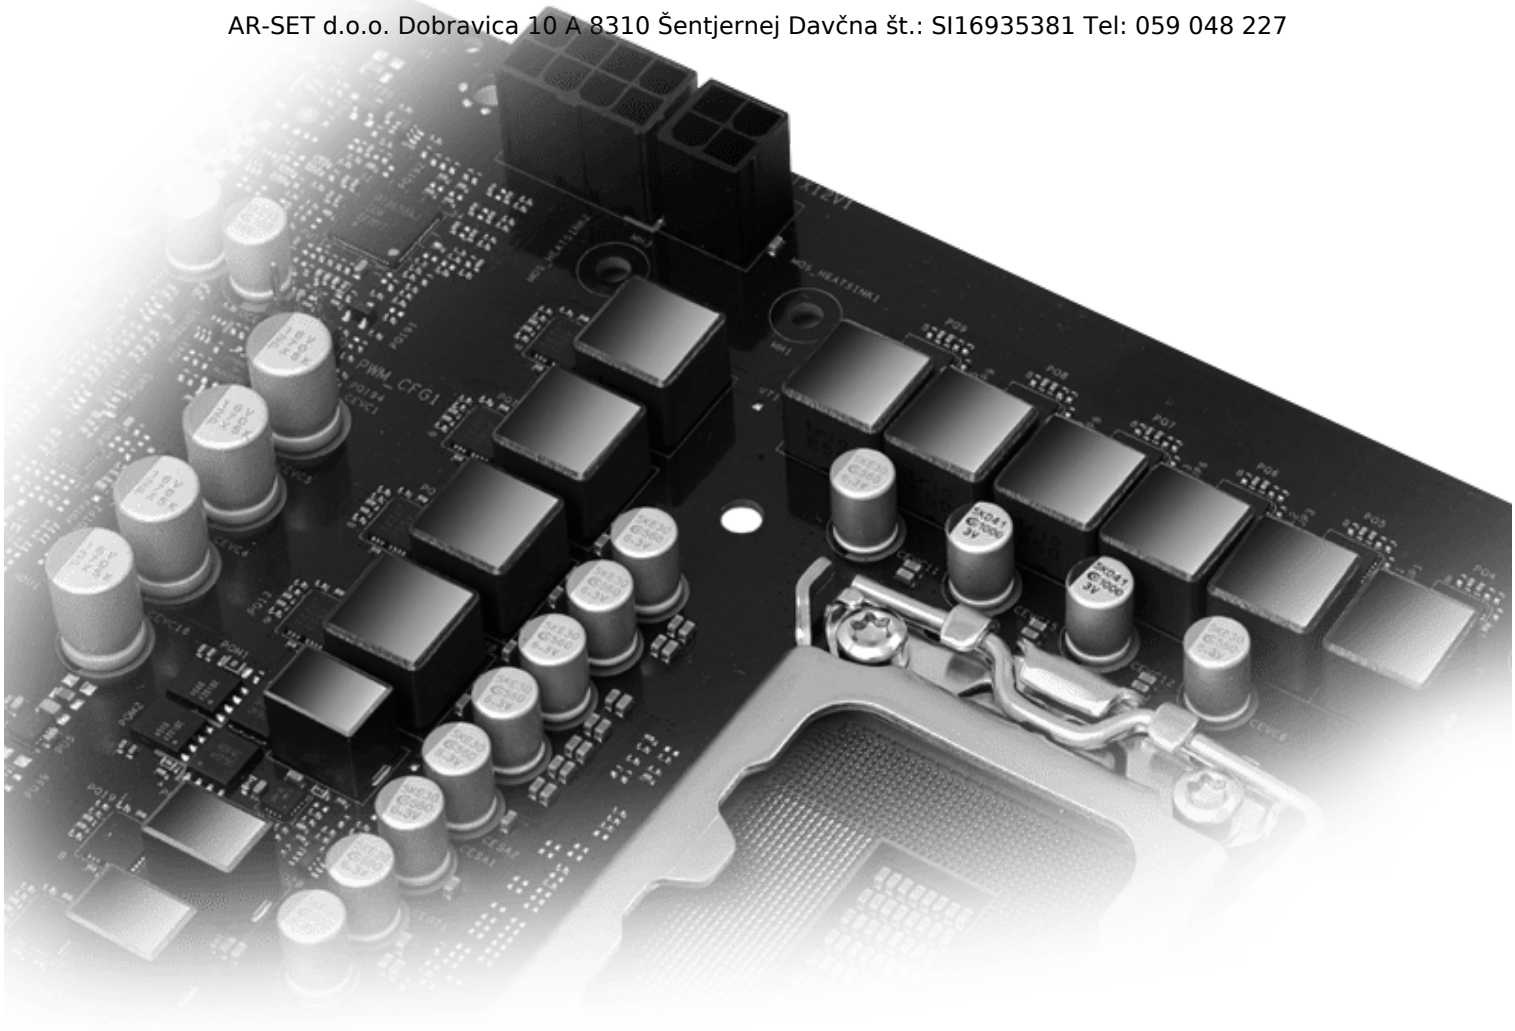

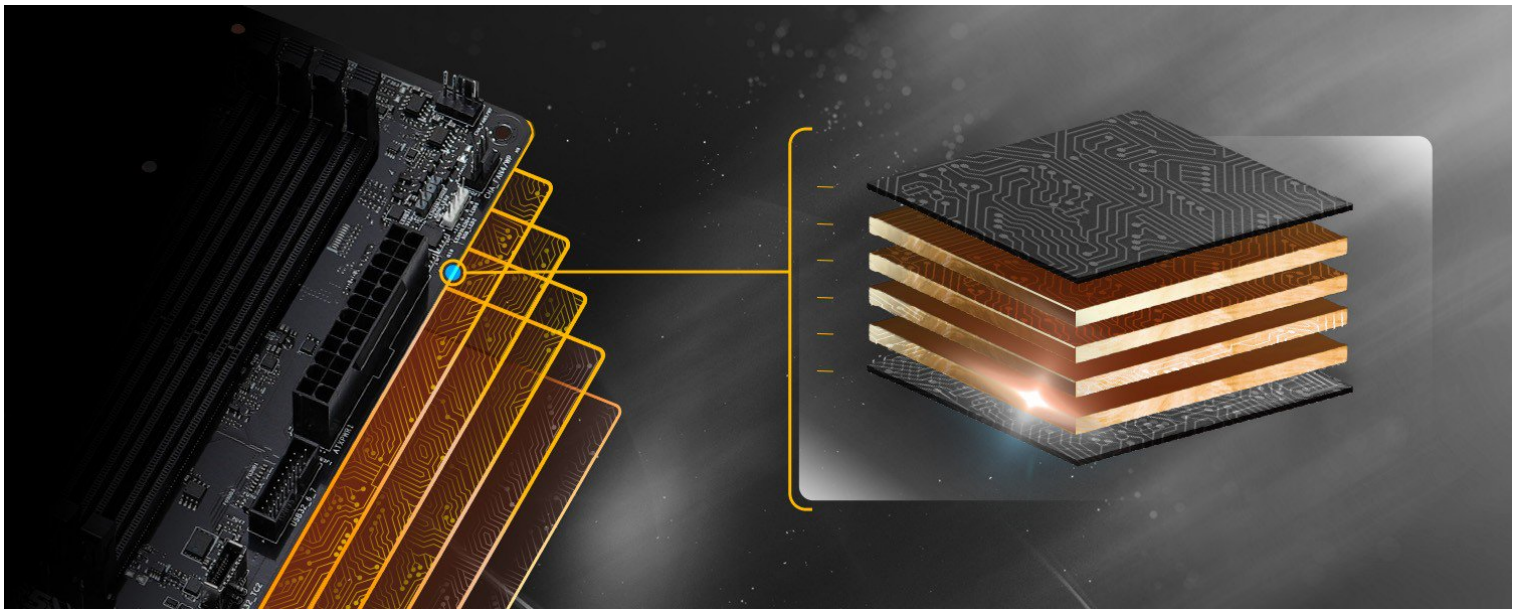

6-slojni PCB

Zasnova s 6-slojnim tiskanim vezjem izboljšuje stabilnost signala in zmanjšuje elektromagnetne motnje, kar zagotavlja zanesljivo delovanje.

Podpora za DDR5 EXPO in XMP

Zagotovite si maksimalno zmogljivost pomnilnika z enostavno podporo za Intel Extreme Memory Profile (XMP) in AMD EXPO tehnologiji.

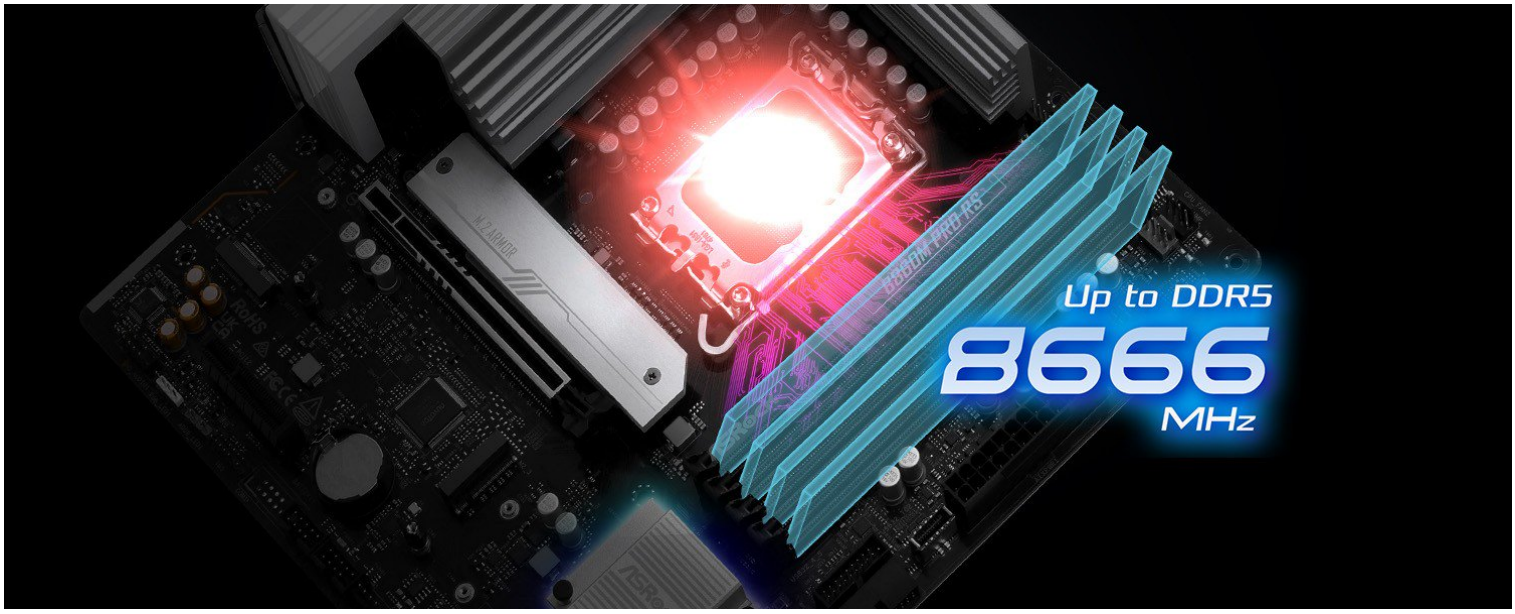



Ultra hitra M.2 rešitev PCIe Gen5

Doživite neverjetne hitrosti prenosa podatkov s PCIe Gen5 M.2 režo, ki omogoča bliskovito hitro delovanje SSD-jev.

Inteligentno hlajenje

Napredna zasnova hlajenja z več priključki za ventilatorje in PWM nadzorom zagotavlja optimalne temperature komponent tudi pri visoki obremenitvi.

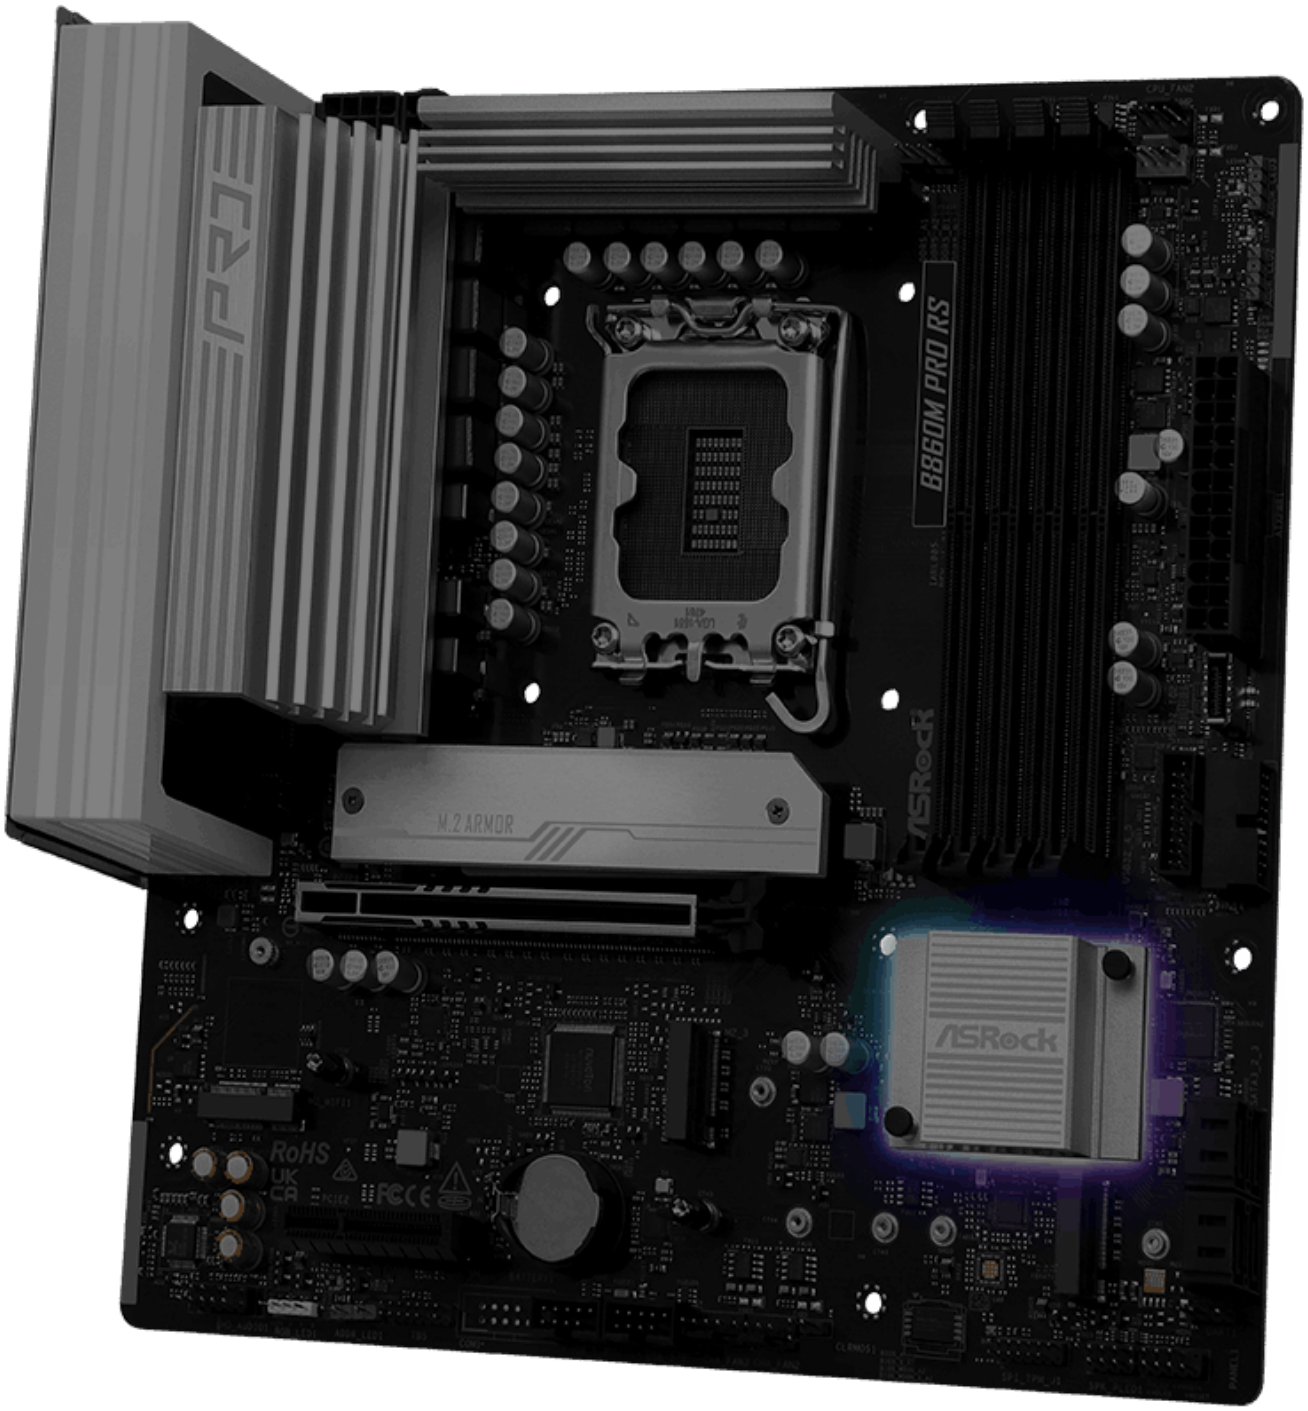

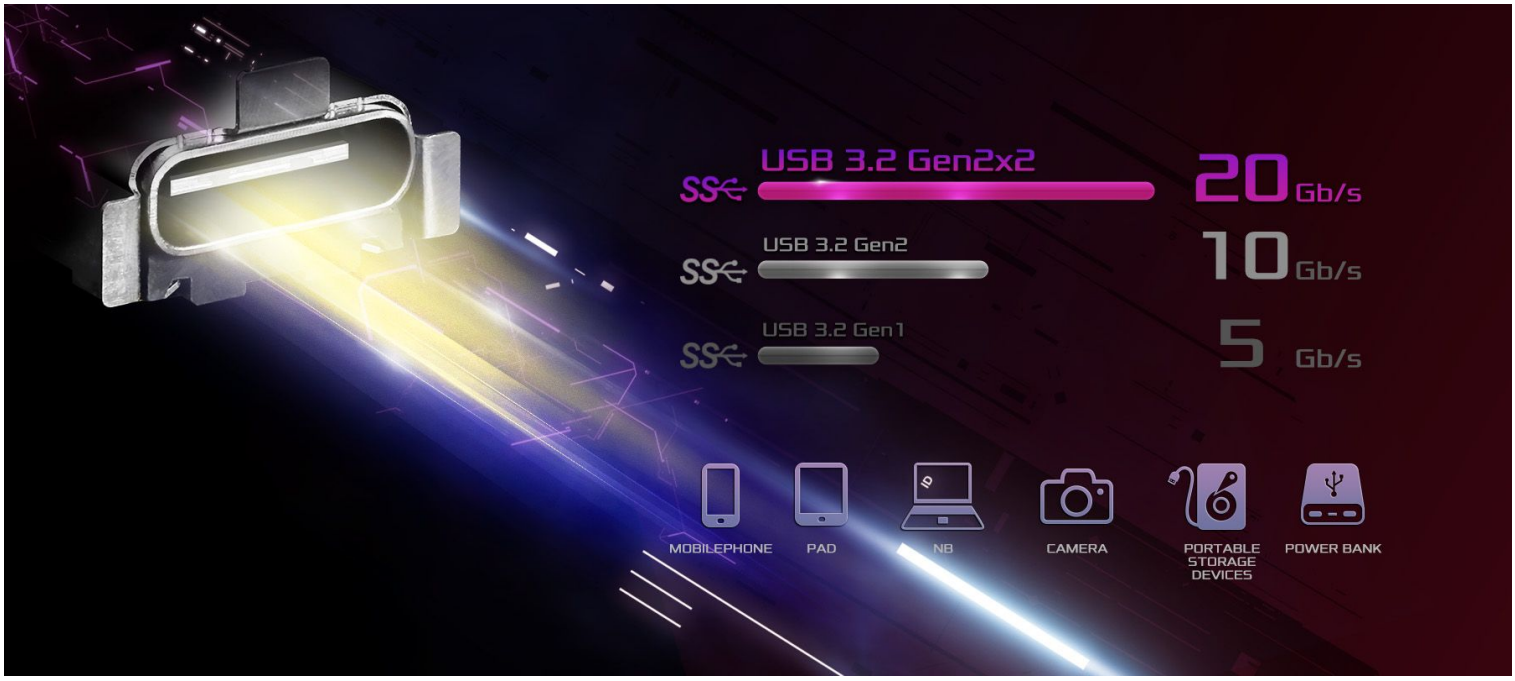

Napredna povezljivost USB

Opremljen z najnovejšimi vrati USB, vključno z USB 3.2 Gen2x2 Type-C s hitrostjo do 20 Gb/s, ter USB 3.2 Gen1 Type-C na sprednji plošči za izjemno vsestranskost.

Lastnost	Specifikacija
CPU	- Podpira Intel Core Ultra Processors (Series 2) (LGA1851)
Čipset	- Intel B860
Pomnilnik	- Dvokanalna DDR5 Memory Technology - 4x DDR5 DIMM Slots - Podpira Intel XMP 3.0 in EXPO - Max. kapaciteta sistemskega pomnilnika: 256GB - Podpira Intel Hybrid Technology - Podpira Intel Turbo Boost Max 3.0 Technology - Podpira Intel Thermal Velocity Boost (TVB) - Podpira Intel Adaptive Boost Technology (ABT) - Integriran NPU za namensko AI pospeševanje
BIOS	- 256Mb AMI UEFI Legal BIOS z GUI podporo
Grafika	- Intel Graphics

Lastnost	Specifikacija
Izhodi	1x HDMI, 1x DisplayPort
Zvok	- 7.1 CH HD Audio (Realtek ALC897 Audio Codec) - Nahimic Audio
LAN	- 2.5 Gigabit LAN 10/100/1000/2500 Mb/s - Dragon RTL8125BG - Podpira Dragon 2.5G LAN Software - Smart Auto Adjust Bandwidth Control - Visual User Friendly UI - Visual Network Usage Statistics - Optimized Default Setting for Game, Browser, and Streaming Modes - User Customized Priority Control
CNVio/CNVio2	CNVio/CNVio2 (Integrated WiFi/BT) Supports NVMe SSD as boot disks
SATA	- 4x SATA3 6.0 Gb/s Connectors - Podpira Intel Volume Management Device (VMD) - Podpira NVMe SSD as boot disks - Podpira RAID 0, RAID 1, RAID 5 in RAID 10 za SATA storage devices
USB	- 6x USB 2.0 (2 Zadaj, 4 Spredaj) - All USB ports support ESD Protection
Konektorji	- 1x SPI TPM Header - 1x Power LED and Speaker Header - 1x RGB LED Header - 1x AIO Pump Fan Connector (4-pin) (Smart Fan Speed Control) - 1x 24 pin ATX Power Connector - 1x 4 pin 12V Power Connector (Hi-Density Power Connector) - 1x Front Panel Audio Connector - 2x USB 3.2 Gen1 Headers (Support 4 USB 3.2 Gen1 ports) - 1x Front Panel Type C USB 3.2 Gen1 Header
Zadnja plošča V/I	- 2x Antenna Mounting Points - 1x HDMI Port - 1x DisplayPort 1.4 - 1x USB 3.2 Gen2x2 Type-C Port (20 Gb/s) - 3x USB 3.2 Gen1 Ports - 2x USB 2.0 Ports - 1x RJ-45 LAN Port - HD Audio Jacks: Line in / Front Speaker / Microphone

Lastnost	Specifikacija
Programska oprema in UEFI	- ASRock Motherboard Utility (A-Tuning) - ASRock Dragon 2.5G LAN Software - ASRock Polychrome SYNC - UEFI - ASRock EZ Mode - ASRock Full HD UEFI - ASRock My Favorites in UEFI - ASRock Auto Driver Installer These utilities can be downloaded from ASRock Live Update & APP Shop.
Dodatna oprema	- 2x SATA Data Cables - 1x Screw for M.2 Socket
Format	- Micro ATX Form Factor: 9.6-in x 9.6-in, 24.4 cm x 24.4 cm
Operacijski sistem	- Microsoft Windows 11 64-bit