




**STIKALO 48-PORT MIKROTIK MI  
10/100/1000  
(CRS354-48P-4S+2Q+RM)**

**1.299,99€**

**SKU:** 24002273

**Kategorije:** [Mrežna oprema](#), [Stikala](#)

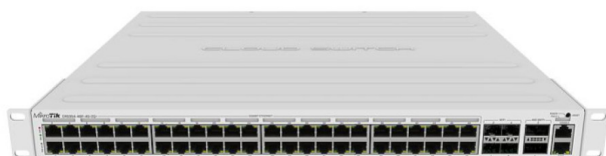

## OPIS IZDELKA

Novi CRS354-48P-4S + 2Q + RM je učinkovita in prilagodljiva stojna rešitev za upravljanje omrežij v najzahtevnejših okoljih.

Za razliko od mnogih drugih stikal, so izdelki Mikrotik narejeni z mislijo na skrbnika sistema.

To močno stikalo ima 48 x 1G RJ45 vrat in 4 x 10G SFP + vrata ter tudi 2 x 40G QSFP + vrata za izjemno hitre optične povezave ali povezovanje z drugimi napravami s hitrostjo 40 Gbps.

Vseh 48 mrežnih vrat ponuja različne možnosti izhodne moči: pasivni PoE, nizkonapetostni PoE, 802.3af / at (tip 1 "PoE" / tip 2 "PoE +") s samodejnim zaznavanjem, zaradi česar je to stikalo najlažja rešitev za napajanje tudi največjih porabnikov.

Vključen je mogočen napajalnik, ki lahko zagotavlja 750 W moči in poleg je še poseben nosilec za enostavno upravljanje kablov.

CRS354-48P-4S + 2Q + RM je izjemno funkcionalen in bo popoln dodatek k profesionalni uporabi omrežja.

Skupna pretočnost je 168 Gbps, preklopna zmogljivost je 336 Gbps, hitrost posredovanja pa 235 Mpps.

## SPECIFIKACIJE:

Details

Product code

CRS354-48P-4S+2Q+RM



|                                           |                                                                                      |
|-------------------------------------------|--------------------------------------------------------------------------------------|
| Architecture                              | AR-SET d.o.o. Dobravica 10 A 8510 Šentjernej Davčna št.: SI16935381 Tel: 059 048 227 |
| CPU                                       | MIPSBE QCA9531                                                                       |
| CPU core count                            | 1                                                                                    |
| CPU nominal frequency                     | 650 MHz                                                                              |
| Dimensions                                | 443 x 382 x 44 mm                                                                    |
| RouterOS license                          | 5                                                                                    |
| Operating System                          | <a href="#">RouterOS</a>                                                             |
| Size of RAM                               | 64 MB                                                                                |
| Storage size                              | 16 MB                                                                                |
| Storage type                              | FLASH                                                                                |
| MTBF                                      | Approximately 200'000 hours at 25C                                                   |
| Tested ambient temperature                | -20°C to 60°C                                                                        |
| Powering                                  |                                                                                      |
| Details                                   |                                                                                      |
| Number of AC inputs                       | 1                                                                                    |
| AC input range                            | 100-240                                                                              |
| Max power consumption                     | 800 W                                                                                |
| Max power consumption without attachments | 85 W                                                                                 |
| FAN count                                 | 4                                                                                    |
| PoE-out                                   |                                                                                      |
| Details                                   |                                                                                      |
| PoE-out ports                             | Ether1-Ether48                                                                       |
| PoE out                                   | 802.3af/at                                                                           |
| Max out per port output (input 18-30 V)   | 1000 mA                                                                              |
| Max out per port output (input 30-57 V)   | 570 mA                                                                               |
| Total output current                      | 27A at 26V OR 13.2A at 53V                                                           |
| Total output power                        | 700W                                                                                 |
| Ethernet                                  |                                                                                      |
| Details                                   |                                                                                      |
| 10/100 Ethernet ports                     | 1                                                                                    |
| 10/100/1000 Ethernet ports                | 48                                                                                   |
| Fiber                                     |                                                                                      |
| Details                                   |                                                                                      |
| SFP+ ports                                | 4                                                                                    |
| Number of 40G QSFP+ ports                 | 2                                                                                    |
| Peripherals                               |                                                                                      |



Details AR-SET d.o.o. Dobravica 10 A 8310 Šentjernej Davčna št.: SI16935381 Tel: 059 048 227

|                     |      |
|---------------------|------|
| Serial console port | RJ45 |
|---------------------|------|

|       |  |
|-------|--|
| Other |  |
|-------|--|

Details

|                         |     |
|-------------------------|-----|
| CPU temperature monitor | Yes |
|-------------------------|-----|

|                 |     |
|-----------------|-----|
| Current Monitor | Yes |
|-----------------|-----|

|                         |     |
|-------------------------|-----|
| PCB temperature monitor | Yes |
|-------------------------|-----|

|                 |     |
|-----------------|-----|
| Voltage Monitor | Yes |
|-----------------|-----|

|                           |  |
|---------------------------|--|
| Certification & Approvals |  |
|---------------------------|--|

Details

|               |               |
|---------------|---------------|
| Certification | CE, EAC, ROHS |
|---------------|---------------|

|    |      |
|----|------|
| IP | IP20 |
|----|------|